



TRIPROOF

ULTRA UTILITY STRIP

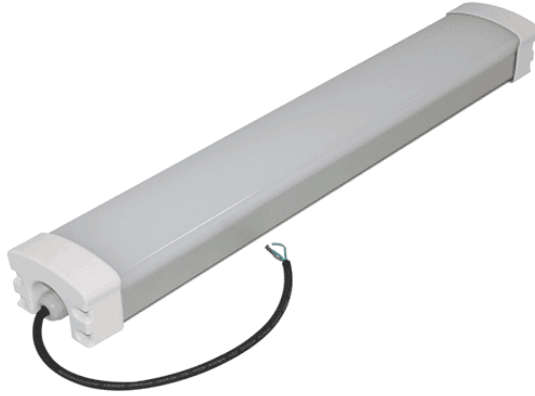

Length	A	B	C
2ft	23.62"	3.72"	2.71"
4ft	47.24"		
8ft	94.49"		

PRODUCT DESCRIPTION:

The Triproof Strip Series is a weather-tight and vandal-resistant linear strip fixture that can stand up to the most demanding of lighting applications. With IP65 and IK10 ratings, two lumen efficacy packages, and options for multiple power connections, integral motion sensors, and emergency battery backup, the Triproof Strip Series is the robust linear solution for your next commercial or industrial lighting project.

Behind-lens sensor and emergency battery backup options make the Utility Strip ideal for stairwell and parking garage applications.

OVERVIEW:

- Two lumen efficacy packages available
- Available Sizes: 2ft, 4ft, & 8ft
- IP65 & IK10 Rated
- Five power connection options to support various applications and installation requirements
- Factory-installed 8W emergency battery backup option available (90-minutes minimum)
- Input voltage: 100 - 277VAC (0-10V dimming standard)
- Power factor: ≥ 0.90
- CRI: $R_a > 80$
- Operating temperature range: -20°C to 50°C
- Rated Life: 50,000+ hours • Limited warranty: 5 years on luminaire

ORDERING INFORMATION:

A complete luminaire assembly is made up of a mount and a luminaire, both items must be ordered separately.

Series	Size	Wattage	Lumen Package	CCT	Voltage	Power Connection	Motion Sensor	Emergency Backup
LC-A65 Aluminum IP65 Triproof Strip	2FT 24"	20W	S 130 lm/W	30K 3000K 40K 4000K 50K 5000K CS Custom CCT	MV 120-277VAC Standard 0-10V Dimming	SO1 SO Cord Out of Endcap SO2 SO Cord Out of Both Endcaps BC SO Cord Out of Center Back of Fixture DE Detachable Endcap with WAGO Connectors SP 5-Pin Connector	Blank No Motion Sensor MS Behind-Lens Microwave Sensor PIR External PIR Sensor	Blank No Emergency Battery Backup EM8W 8W Emergency Battery Backup
		30W						
	4FT 48"	40W 50W 60W	HO 150 lm/W					
	8FT 96"	60W 80W						



Series	Size	Wattage	Lumen Package	CCT	Voltage	Power Connection	Motion Sensor	Emergency Backup
LC-A65 Aluminum IP65 Triproof Strip	2FT 24"	20W 30W	S 130 lm/W HO 150 lm/W	30K 3000K 40K 4000K 50K 5000K CS Custom CCT	MV 120-277VAC Standard 0-10V Dimming	SO1 SO Cord Out of Endcap SO2 SO Cord Out of Both Endcaps BC SO Cord Out of Center Back of Fixture DE Detachable Endcap with WAGO Connectors 5P 5-Pin Connector	Blank No Motion Sensor MS Behind-Lens Microwave Sensor PIR External PIR Sensor	Blank No Emergency Battery Backup EM8W 8W Emergency Battery Backup
	4FT 48"	40W 50W 60W						
	8FT 96"	60W 80W						